

## PP15A1-50



Image for illustrative purposes only

**Plug-in Surge Filters**

Whether you are looking to protect your home theatre, HIFI, computer server, PC or communications equipment Novaris surge filters offer class leading performance and reliability. Simple and convenient to install, simply plug the product in and clean, filtered power is now at your disposal, giving you peace of mind knowing that your assets are protected.

**15 Amp current rated**

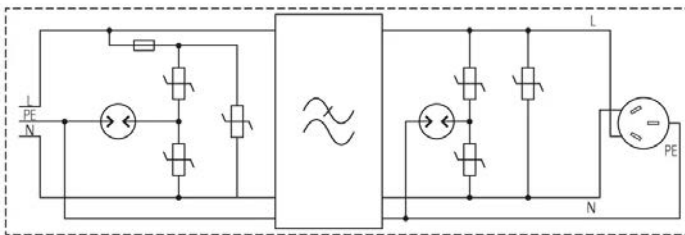
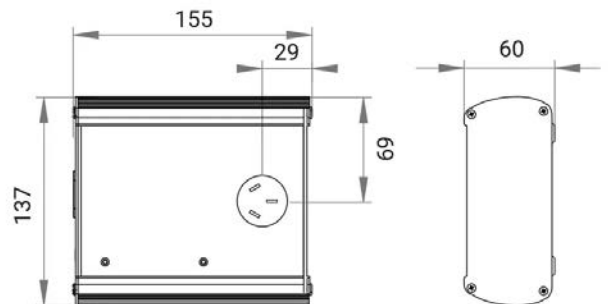
The PP15A1-50 is designed to use with the Australian and New Zealand 15A type AU2-15P AS/NZS 3112 wall outlets. It provides the same clean and filtered power as the standard 10A plug-in units but with a full 15A continuous current rating.

**All Mode Protection**

Protection is provided for all combinations of lines ensuring the maximum level of protection is achieved at all times.





**Safe Metal Enclosure**

Novaris power protection products are housed in safe, all metal enclosures. In the event of a prolonged overvoltage they will not catch fire or explode.

**Wiring****Dimensions**

## Product Datasheet

### Electrical Specifications

Connection type		Series
Modes of protection		L-N, L-PE, N-PE
Number of ports		2
Number of phases		1
Location		Indoor
Nominal voltage	$U_0$	230VAC
Short circuit withstand level	$I_{SSCR}$	25kA
Maximum backup fuse		15A
Earth leakage current	$I_{PE}$	<500 $\mu$ A

### Electrical (L-N) Specifications

Maximum load current	$I_L$	15A
Maximum continuous voltage AC	$U_c$	275VAC
Maximum voltage drop (% of $U_0$ )		<1%
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$	50kA
3dB frequency @ 50 $\Omega$		900Hz
Nominal discharge current (8/20 $\mu$ s)	$I_n$	20kA
Voltage protection level (3kA 8/20 $\mu$ s)	$U_p$	<700V
Response time	$t_A$	Instantaneous
Voltage withstand (5s)	$U_T$	440V












### Electrical (N-PE) Specifications

Maximum continuous voltage	$U_c$	275VAC
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$	50kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$	20kA
Voltage protection level (1kV/ $\mu$ s)	$U_p$	<800V
Response time	$t_A$	<25ns

### Indication Specifications

Display		LED Power and Status
---------	---	----------------------

### Mechanical Specifications

Outlet connection		15A AU2-15P
Number of outlets		1
Minimum operating temperature		-40°C
Maximum operating temperature		70°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		Free standing
Environmental rating		IP20
Enclosure material		Aluminium
Enclosure finish		Black powdercoat
Length		137mm
Width		155mm
Height		60mm
Dimensional tolerance		0.5mm

### Standard Specifications

IEC 61643-11	SPD connected to low-voltage power systems - Type 2, 3
AS 1768	AC power system SPD - Cat B, A
IEEE 62.41.2	Low voltage SPD - Type 3
UL 1449	Low voltage SPD - Cat C

### Other Specifications

Product Code		PP15A1-50
--------------	---	-----------

### Shipping Specifications

Weight		1.5kg
Customs tariff		85363000, 85363010