

Product Datasheet

SDPV-40-1000



Image for illustrative purposes only


SDPV Solar Protector

Novaris SDPV's are designed for photovoltaic system DC-side protection against the damage from surges caused by lightning or over voltages. These SPD's are Type1/Type2.


Replaceable pluggable elements

Pluggable design allows for easy removal and replacement.

Wiring

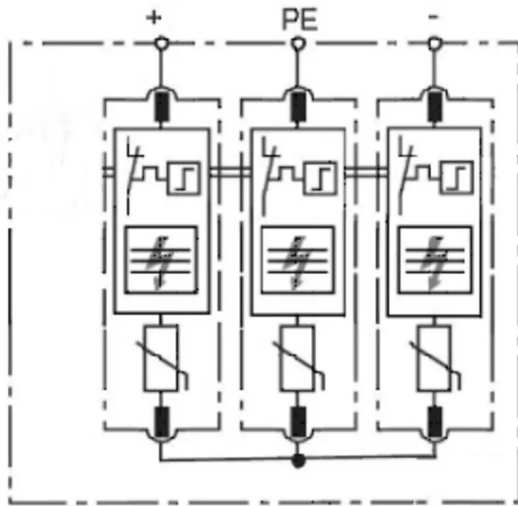

Dimensions

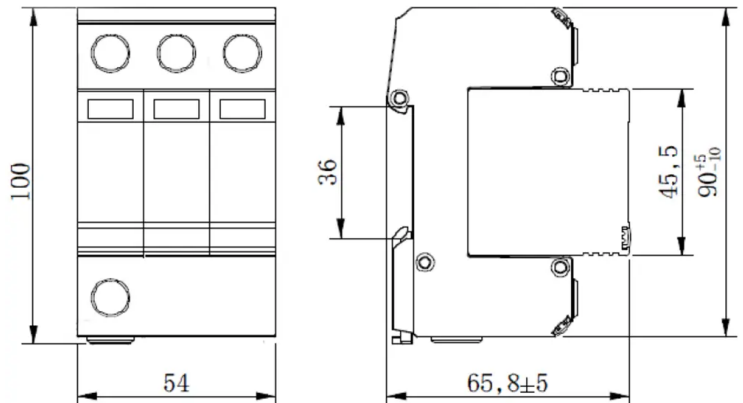

Product Datasheet

Electrical Specifications

Connection type		Shunt
Modes of protection		(+)-(-), (+)-PE, (-)-PE
Number of ports		1
Number of phases		2
Location		Indoor
Nominal voltage	U_0	1000VDC
Short circuit withstand level	I_{SSCR}	40kA
Earth leakage current	I_{PE}	<2μA

Electrical (L-L) Specifications

Maximum continuous voltage	U_c	720VAC
Maximum continuous voltage DC	U_c	1020VDC
Maximum discharge current (8/20 μs)	I_{max}	40kA
Nominal discharge current (8/20 μs)	I_n	20kA
Lightning impulse current (10/350 μs)	I_{imp}	6.25kA
Voltage protection level (3kA 8/20μs)	U_p	<4200V
Response time	t_A	<25ns

Electrical (L-PE) Specifications

Maximum discharge current (8/20 μs)	I_{max}	40kA
Lightning impulse current (10/350 μs)	I_{imp}	6.25kA
Nominal discharge current (8/20 μs)	I_n	20kA
Total current		12.5kA
Voltage protection level @ 3 kA 8/20 μs	U_p	<4200V
Response time	t_A	<25ns

Indication Specifications

Display		Status indicator
---------	---	------------------

Mechanical Specifications

Minimum operating temperature		-40°C
Maximum operating temperature		85°C
Minimum operating humidity		5%
Maximum operating humidity		95%
Mounting method		TS35 DIN Rail
Environmental rating		IP20
Enclosure material		Thermoplastic
Terminal capacity - power		35mm²
Terminal screw torque - power		2Nm
Length		100mm
Width		54mm
Height		66mm

Standard Specifications

EN 50539-11	Low-voltage surge protective devices
IEC 61643-31	Low-voltage surge protective devices

Other Specifications

Product Code		SDPV-40-1000
--------------	---	--------------

Shipping Specifications

Weight		325g
--------	---	------